


# Trojan and Titan accessories

## Terminal Blocks

All terminal blocks used in Street Lighting products are machined from solid brass which is electro-tin plated to prevent oxidisation. Both solid aluminium and stranded copper conductors up to 25mm<sup>2</sup> can be utilised. The terminal bores are serrated for optimum conductivity and are fitted with brass M6 screws. Additional methods of termination include pillar terminals which again are of brass construction.

Standard fitment  
2TT

Optional terminations  
3TT  
Brass pillar BP

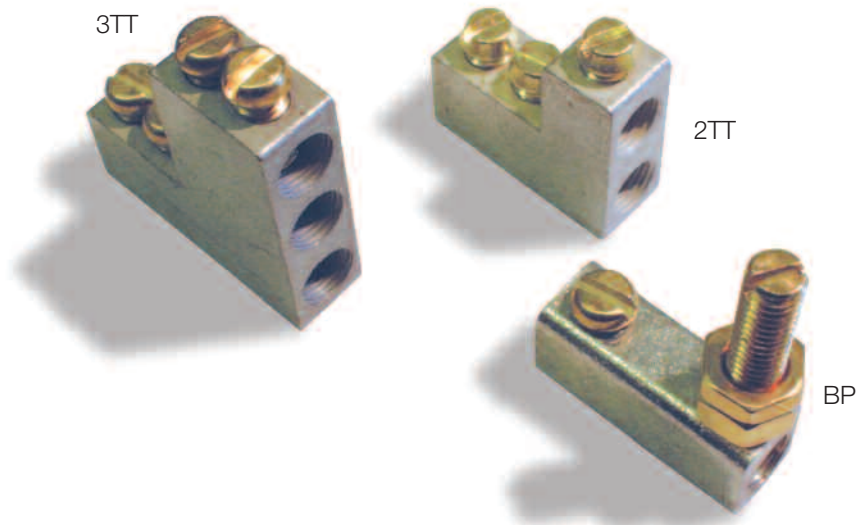

## Gland Plates

Brass or insulated gland plates are available in one, two or three entry formats. They are able to receive 20, 25 or 32mm brass tubes for the termination of SWA cables or alternatively grommets and cable glands of the sizes indicated in the Selection charts. Internal earth leads are supplied with all brass gland plates.

