


Fortress Mini pillars are available in 7 sizes to cater for the needs of most small installations. The top mounted tri-head lock secures the door in place. With the lock opened, the door lifts away from its slot location at the bottom of the cabinet to give unrestricted access to the pillar internals. The following finishes are available:

HDG: Mild steel hot dip galvanised to BS EN ISO 1461


HDP: Mild steel hot dip galvanised to BS EN ISO 1461 followed by a pre-treatment then painted grey RAL 7012 as standard.

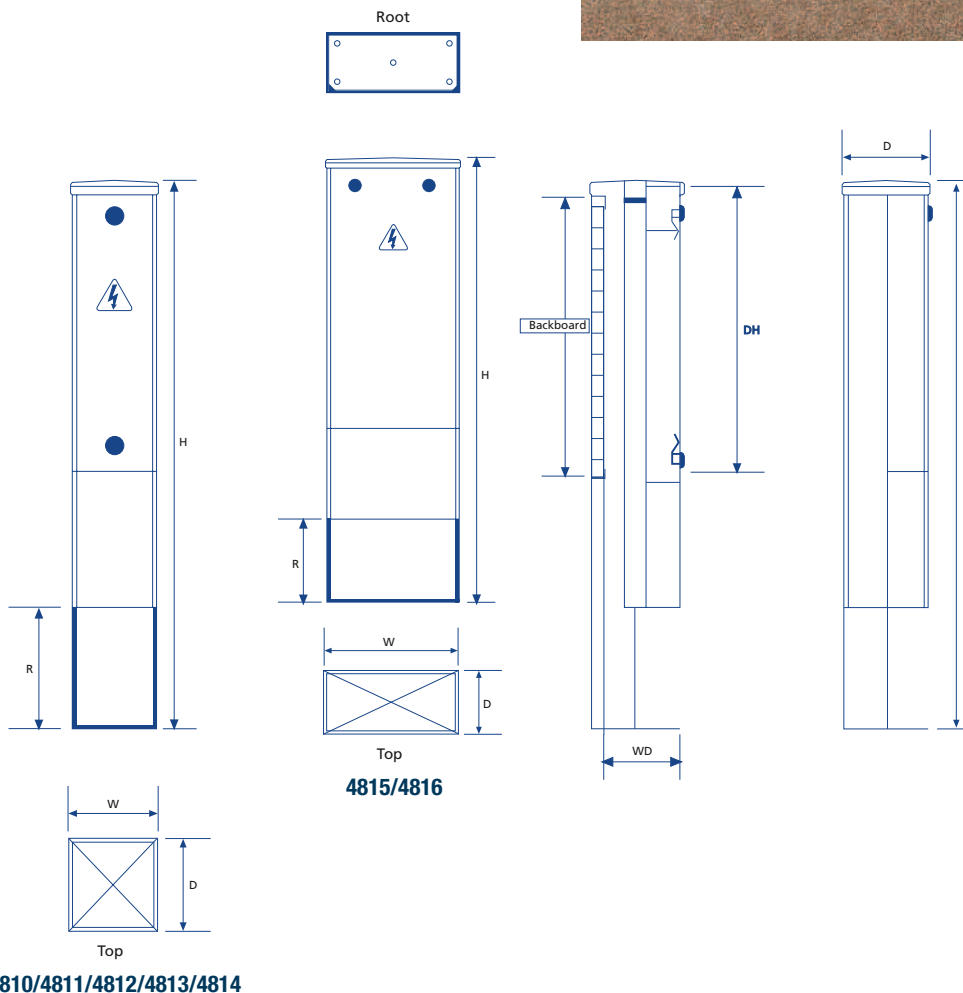

Dimensions (mm)

Pillar size code	4810	4811	4812	4813	4814	4815	4816
Nominal Size in inches (WxD)	4x4	6x4	6x6	8x6	10x6	14x6	19x10
Height Above Ground	785	785	785	785	785	985	1000
Root Section (R)	300	300	300	300	300	300	300
Width (W)	113	163	163	213	265	365	503
Depth (D)	120	120	170	170	170	170	250
Door Opening Height (DH)	510	510	510	510	510	710	800
Working Depth (WD)	85	85	130	130	130	130	199
Backboard Size (WxH)	90x500	140x500	140x500	190x500	240x500	345x700	480x780
Weight (Kg)	11	14	16	19	22	32	47

The ordering code consists of 4 sections

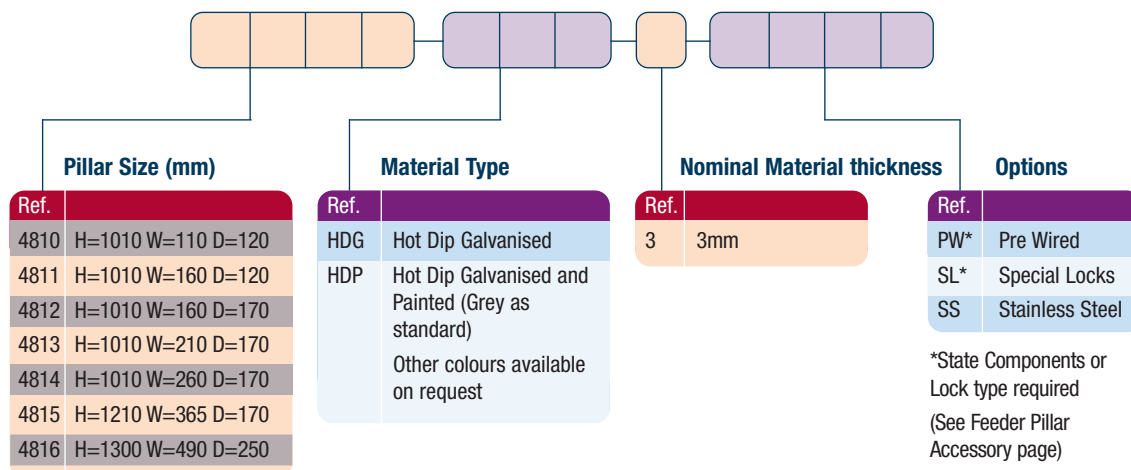

Specification

Removable doors with tri-head locks
 Back board made from 18mm treated exterior grade plywood
 Detachable roof enabling pre-equipped back board to be installed on site
 'Danger' warning label fitted in door recess

Earth lead between pillar body and door
 High quality UV resistant paint to an average thickness of 60 microns
 Stainless steel fixings and locks
 Detachable root section finished in bitumen enriched paint

Options

Stainless steel cabinet
 Customer specification pre-wired solutions available
 Other colours / labels available to special order
 Optional G2A Highways Agency paint specification